

匯統國際股份有限公司
Huey Tung International Co., Ltd.

產品規格書 Specification

[Model : HT-4164B / 2018.06.14 version]



Cara

Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.

Tel: 886-7-310 5786 / Fax: 886-7-310 0783

E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>


揚聲器製品規格書

SPEAKER SPECIFICATION

型號 Model Number: HT-4164B

項 目 Items		規 格 Specification			
1	公稱阻抗 Nominal Impedance	4Ω±15% at 500 Hz 1.0v			
2	最低共振周波數 Lowest Resonance Frequency	122 Hz±20%Hz Without a baffle			
3	實效周波數帶域 Effective Frequency Range	F0～20KHz -10dB			
4	出力音壓 Output Sound Pressure Level	85dB±3dB 1W/M at (600,800,1K,1.2K)Hz AVE.			
5	入力 Input	定格入力 Rated input 30 W	最大入力 Maximum input 60 W		
6	磁束密度 Flux Density	-----±10% GAUSS			
7	異常音試驗電壓 Buzz & Rattle Test	Must be normal at sine wave 7.75 V			
8	動作試驗電壓 Operation Test	Must be normal at program source			
9	極性 Polarity	/			
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet:80*40*15+80*40*10 Sub Magnet:	/G		
11	連續負荷試驗 Life Test	EIA-R426B noise 30 W 8 hours	After the Test, Speaker should be meet the Outside and item 7,8		
12	耐熱試驗 Heat Resistance	70℃ ± 5℃ 30%-35%RH 8Hours and then room temperature 1 hours			
13	耐濕試驗 Humidity Resistance	40℃ ± 2℃ 90%-95%RH 8Hours and then room temperature 1 hours			
14	耐寒試驗 Cold Resistance	/			
15	落下試驗 Drop Test	1M 75°±2°			
16	絕緣耐壓試驗 Insulation Resistance	Or more 1MΩ 以上			
17	周波數特性 Frequency Response Curve	參照附图 On Other Drawing			
18	失真率 Distortion	/			
19	各部 材質	Cone Paper	Cloth Edge+Paper cone		
		Voice Coil	Kapton+SV		
		Cap	Paper		
20	總重量 Total Net Weight/Box	3185g / pc			
		Size: 4" 試作發行: 2018.06.14	Approve: Arthur	Check: Adele	Design: Akiyama

音波曲線 Frequency: HT-4164B

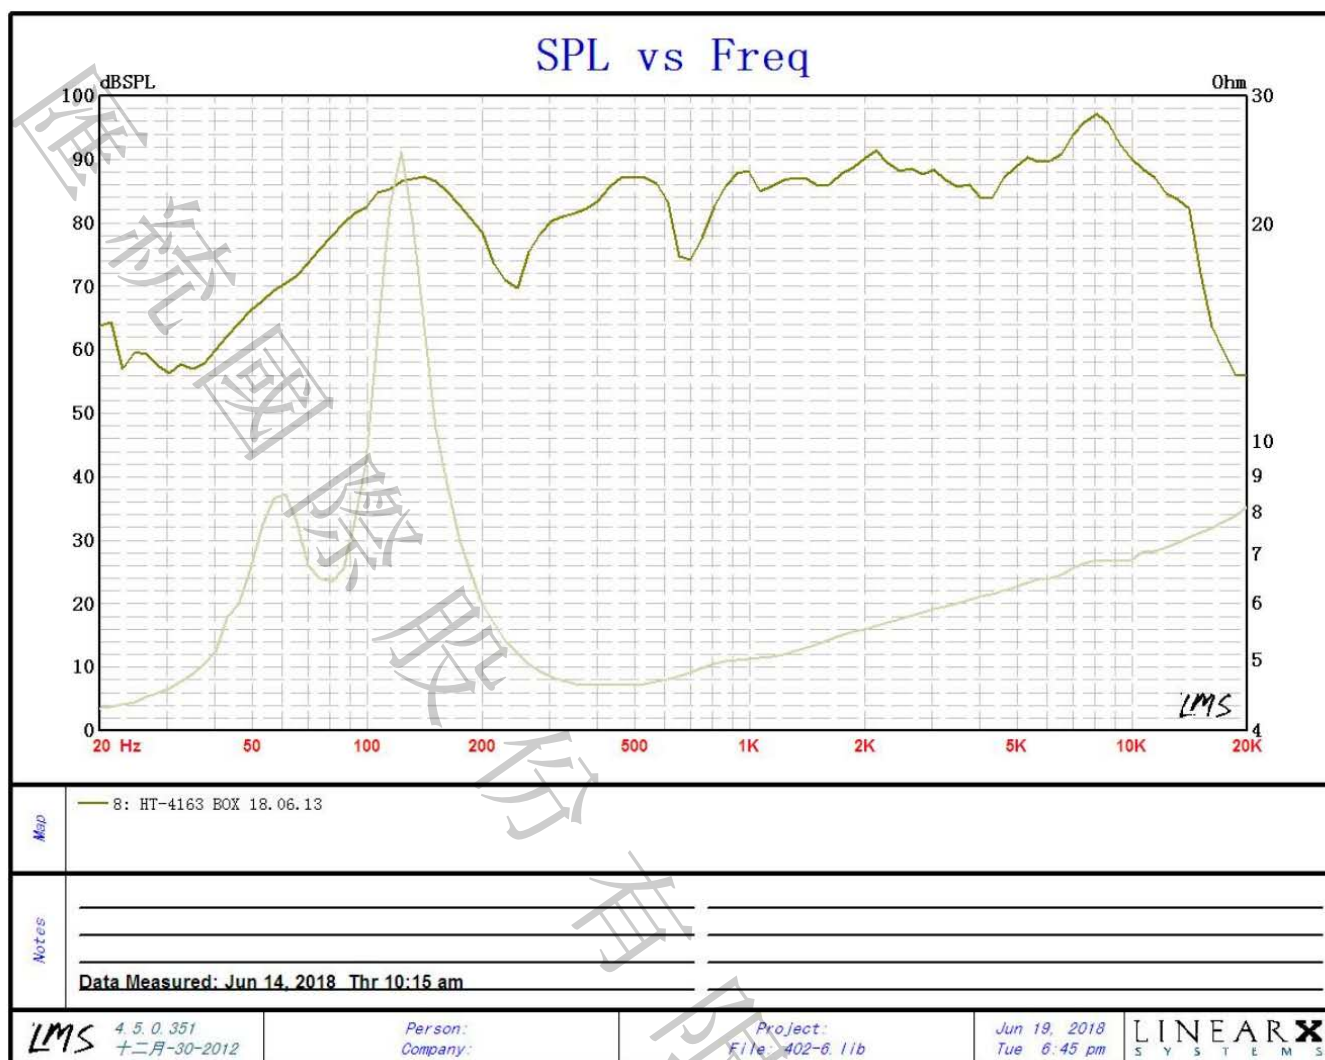

成品圖及照片 Mechanical Dimensions : HT-4164B

