



匯統國際股份有限公司

Huey Tung International Co., Ltd.

產品規格書 Specification

[Model : HT-4149B / 2013.3.22 version]



Cara Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.

Tel: 886-7-310 5786 / Fax: 886-7-310 0783


E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>

揚聲器製品規格書


SPEAKER SPECIFICATION

型號 Model Number: HT-4149B 4 寸橡胶边+CARBON

项 目 Items		规 格 Specification			
1	公称阻抗 Nominal Impedance	8Ω±5% at 300 Hz 1.0v			
2	最低共振周波数 Lowest Resonance Frequency	80 Hz±20%Hz Without a baffle			
3	实效周波数帯域 Effective Frequency Range	F0～20KHz -10dB			
4	出力音压 Output Sound Pressure Level	81dB±3dB 1W/1M at (600,800,1K,1.2K)Hz AVE.			
5	入力 Input	定格入力 Rated input 10 W	最大入力 Maximum input 20 W		
6	磁束密度 Flux Density	-----±10% GAUSS			
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 8.95 V			
8	动作试验电压 Operation Test	Must be normal at program source			
9	极性 Polarity	/			
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet:70*32*15 Sub Magnet:	/G		
11	连续负荷试验 Life Test	EIA-R426B noise 10 W 8 hours	After the Test, Speaker should be meet the Outside and item 7,8		
12	耐热试验 Heat Resistance	70℃±5℃ 30%-35%RH 8Hours and then room temperature 1 hours			
13	耐湿试验 Humidity Resistance	40℃±2℃ 90%-95%RH 8Hours and then room temperature 1 hours			
14	耐寒试验 Cold Resistance				
15	落下试验 Drop Test	1M 75°±2°			
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上			
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing			
18	失真率 Distortion	/			
19	各部 材质	Cone Paper	Rubber Edge+PP carbon cone		
		Voice Coil	Kapton+sv		
		Cap	Aluminum		
20	总重量 Total Weight	/			
		Size: 4" 音箱 試作發行: 2011.10.18	Approve: Arthur	Check: #####Chen	Design: LIU

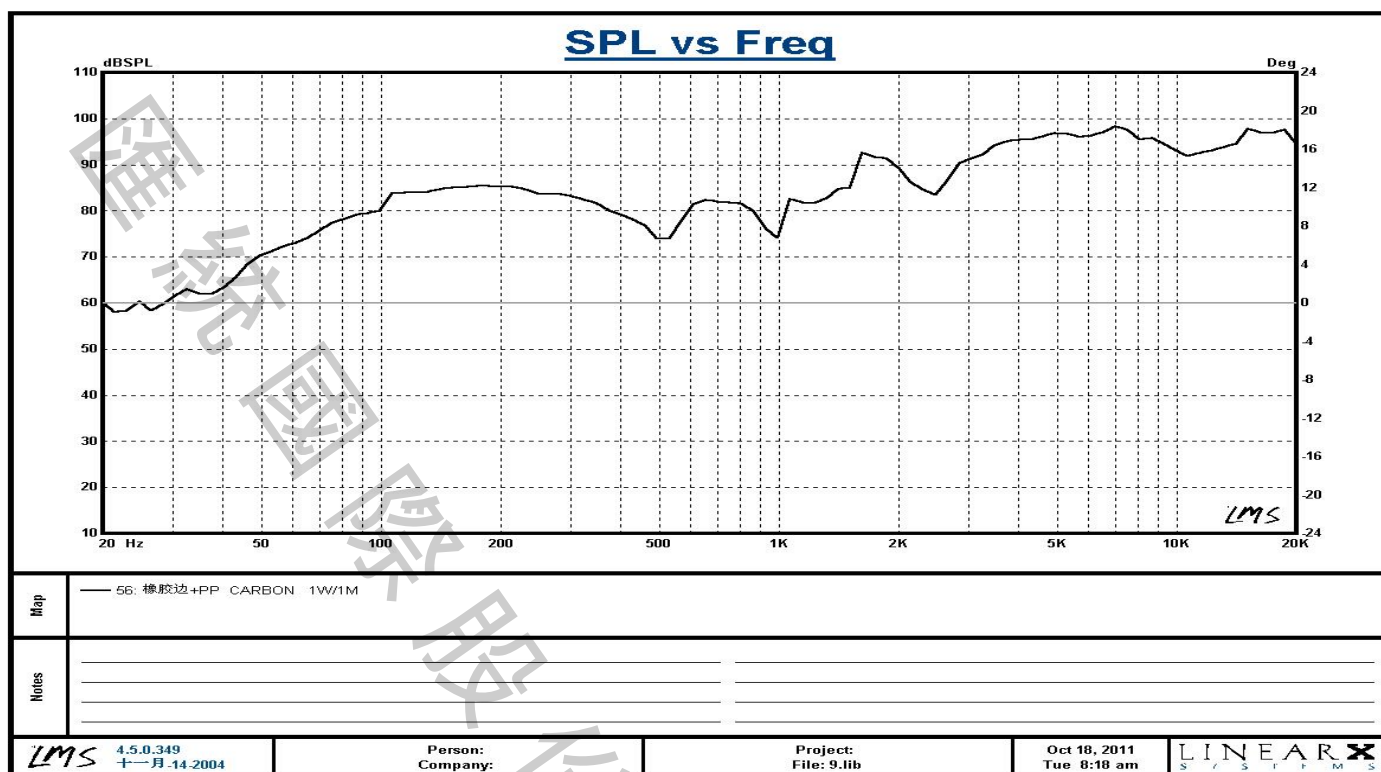

成品圖及照片 Mechanical Dimensions : HT-4149B 4 寸橡胶边+CARBON

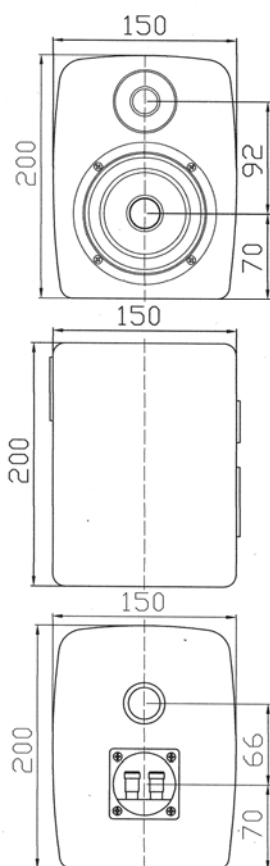

Tolerance: ± 0.5

Unit: mm



White/ Red /Orange/Yellow/Champagne (Color for choose)