



匯統國際股份有限公司

Huey Tung International Co., Ltd.

產品規格書

Specification

[Model : HT-C3434B42F8W-300-750 / 2012.11.19 version]



Cara Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.


Tel: 886-7-310 5786 / Fax: 886-7-310 0783


E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>


揚聲器製品規格書

SPEAKER SPECIFICATION

型號 Model Number: HT-C3434B42F8W-300/750 (6106)

項目 Items		規格 Specification		
1	公称阻抗 Nominal Impedance	7.2Ω±0.2%		
2	最低共振周波数 Lowest Resonance Frequency	540 Hz±20%Hz Without a baffle		
3	实效周波数带域 Effective Frequency Range	F0~9KHz -10dB		
4	出力音压 Output Sound Pressure Level	82dB±3dB 1W/1M at (600,800,1000,1200)KHz AVE.		
5	入力 Input	定格入力 Rated input 3 W	最大入力 Maximum input 5 W	
6	磁束密度 Flux Density	-----±10% GAUSS		
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 3.46 V		
8	动作试验电压 Operation Test	Must be normal at program source 4.98 V		
9	极性 Polarity	/		
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet:18.5*4 N35 Sub Magnet:	8 G	
11	连续负荷试验 Life Test	PinkDin45573 noise 3 W 96 hours	After the Test, Speaker should be meet the Outside and item 7,8	
12	耐热试验 Heat Resistance	55°C±2°C 20%-25%RH 8Hours and then room temperature 1 hours		
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH 8Hours and then room temperature 1 hours		
14	耐寒试验 Cold Resistance	/		
15	落下试验 Drop Test	1M 75°±2°		
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上		
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing		
18	失真率 Distortion	Rated Power Input 3W At 1000 Hz		
19	各部 材质	Cone Paper	Foam edge	
		Voice Coil	/	
		Cap	/	
20	总重量 Total Weight	/		
	Size: 20mm	Approve:	Check:	Design:
	試作發行: 2010.8.13	Arthur	Chen	LIU

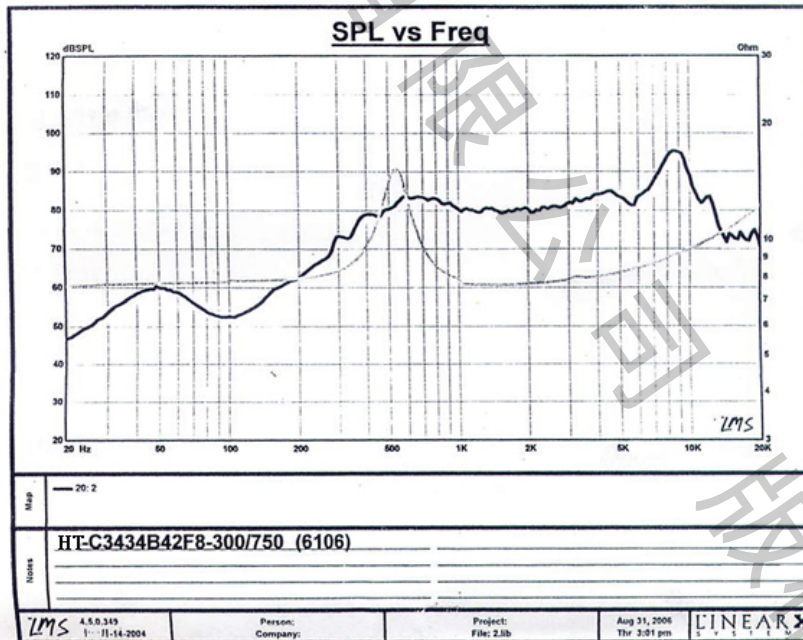

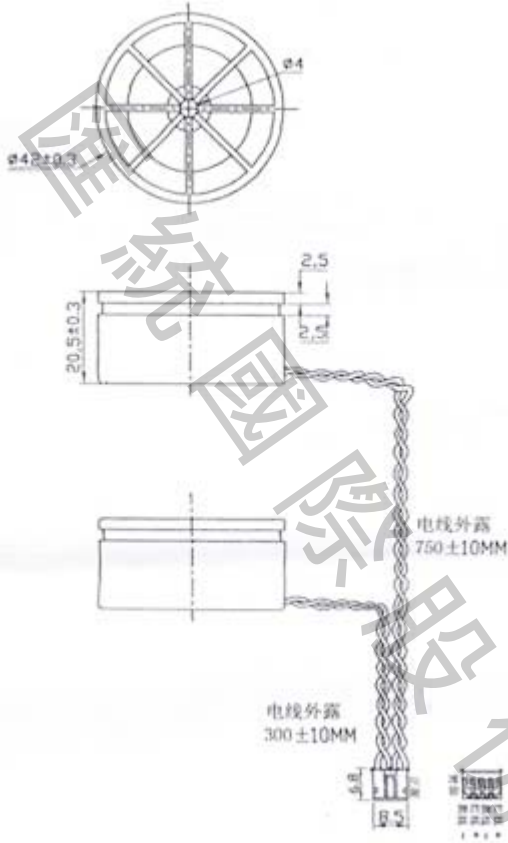

Tolerance: ± 0.5

Unit: mm

